


## MODEL CXCA180CRD3

TOP

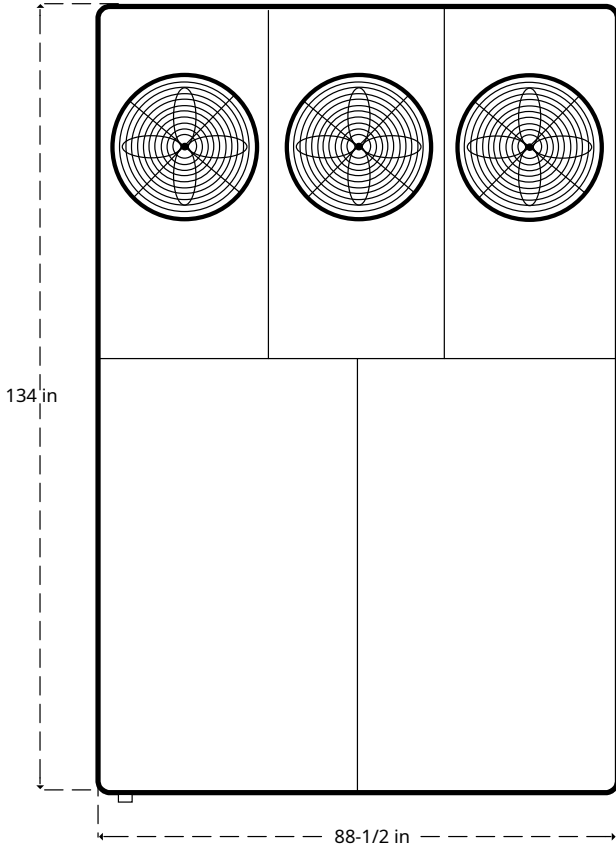


**SPECIFICATIONS:**

- 180,000 BTU/HR at 95F Ambient and 55F Water Out
- 90,000 BTU/HR at 95F Ambient and 28F Water Out (With LT Upgrade)
- Electrical: 460V, 60hz 3-Phase
- Minimum Circuit Ampacity: 90 Maximum Fuse Size 100 Amps
- (1) 126 Gallon Insulated Stainless Steel Tank
- (1) 1-1/2 HP Pump: 59 GPM Max, 51 PSI Max (For Evaporators)
- (1) 1-1/2 HP Pump: 59 GPM Max, 51 PSI Max (For Process)
- (2) Copeland Scroll Compressors
- R-32 Refrigerant [Fully Charged & Tested]
- Approximate Shipping Weight: 2,250 LBS (Empty), 3,050 LBS (Full)
- Dimensions: 88-1/2" Wide, 134" Long, 56" Tall
- Decibels: 88

**\* OPTIONS:**

- Low Temp (28F LWT)
- Expansion Ports
- Hot Gas Recovery
- Hot Gas By-Pass
- Hail Guards
- Upgraded Insulation
- Low Level Alarm
- Dry Chiller For Secondary Cooling
- Controller Extension Cord
- Remote Monitoring/Control w/ Cloud Services

END

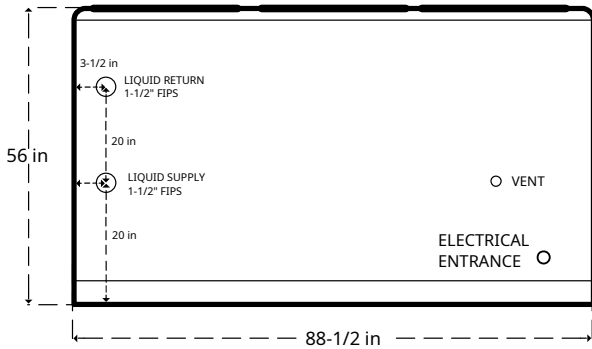

SIDE

