


MODEL CXVA048CRS3CR

TOP

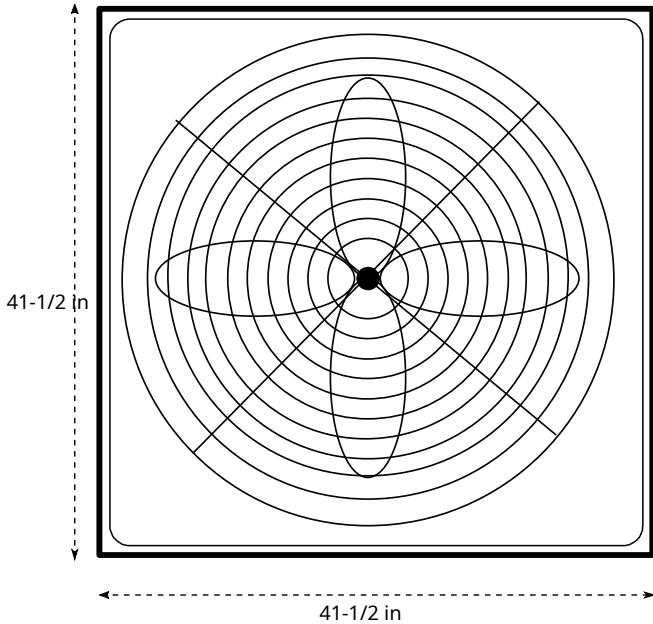


SPECIFICATIONS:

- Low temperature chiller
- 48,000 BTU/HR at 90F ambient & 55F water out
- 24,000 BTU/HR Estimated at 90F ambient & 28F water out (With LT)
- Electrical: 208/230V, 60hz three phase
- Minimum Circuit Ampacity: 22, Maximum Fuse Size 38 Amps
- (1) Copeland scroll compressor
- (1) Insulated 36G stainless steel tank
- (1) 1 HP water pump: 47 GPM max, 49 PSI max
- R-32 Refrigerant [Fully charged and tested]
- Approximate shipping weight 740 LBS
- Dimensions: 41-1/2" wide, 41-1/2" long, 64" tall
- Decibels: 76

OPTIONS:

- Extra Insulation
- Expansion Ports
- Low Level Alarm
- Low Temp (25-28F LWT)
- Controller Extension Cord (+15')
- High Pressure Bypass Valve

FRONT

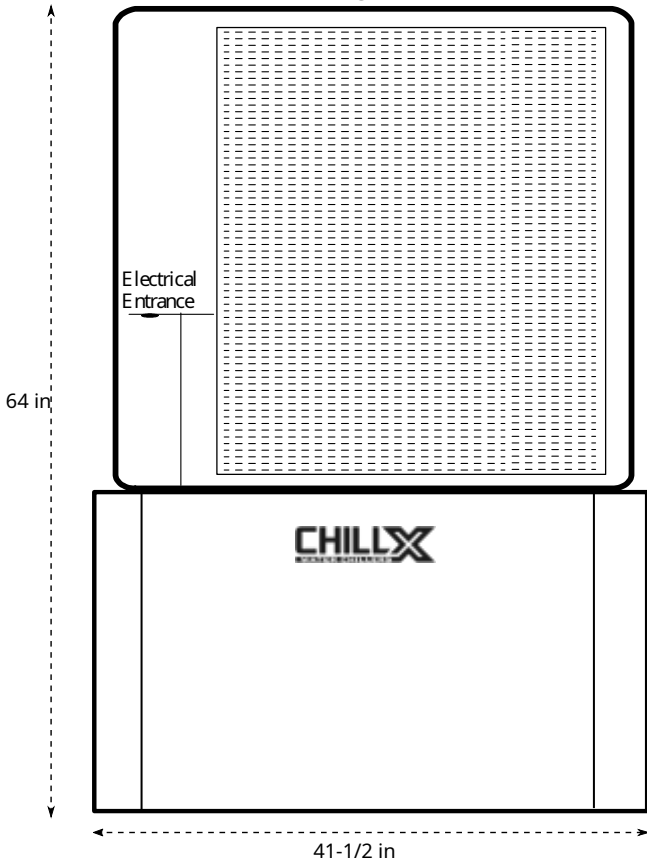

REAR

