


TOP

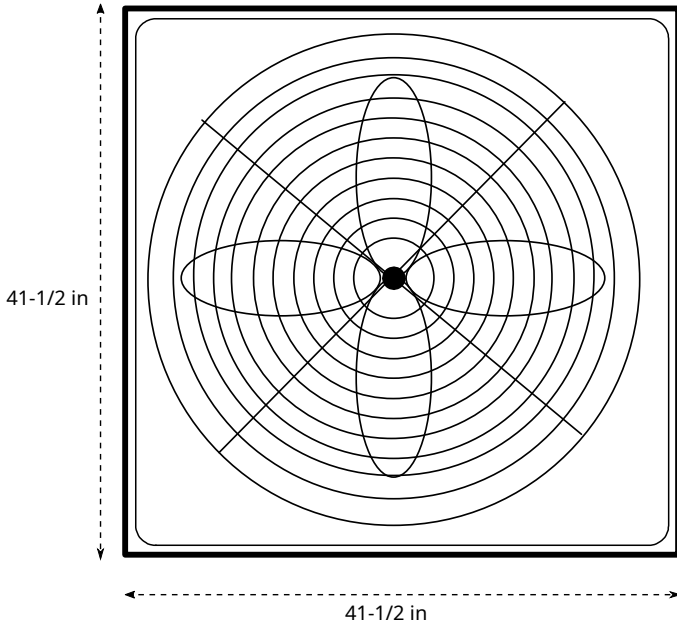

MODEL CXVA060CRS1CR


SPECIFICATIONS:

- Low temperature chiller
- 60,000 BTU/HR at 90F degree ambient and 55F degree water out
- 30,000 BTU/HR at 90F degree ambient and 28F degree water out (With LT)
- Electrical: 208/230V, 60hz single phase
- Minimum Circuit Ampacity: 42, Maximum Fuse Size 68 Amps
- (1) 36G insulated stainless steel tank
- 1 HP water pump: 47 GPM max, 49 PSI max
- R-32 Refrigerant - Fully Charged & Tested
- (1) Copeland scroll compressor
- Approximate shipping weight 850 LBS
- Dimensions: 41-1/2" wide, 41-1/2" long, 67-1/2" tall
- Decibels: 76

OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Low Level Alarm
- Expansion Ports
- Extra Insulation
- Controller Extension Cord (approx 15')

FRONT

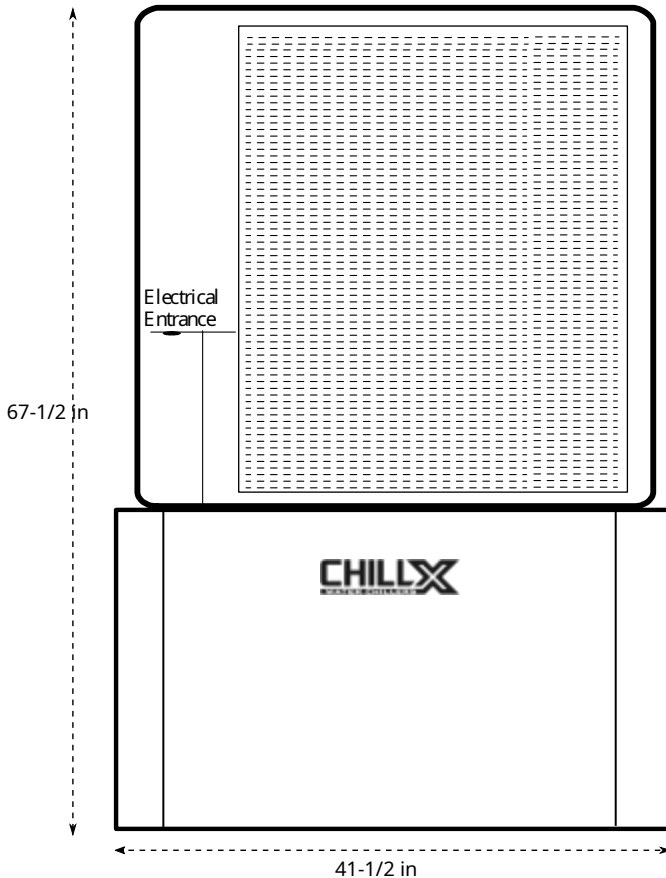

REAR

