


MODEL CXCA060CRS4

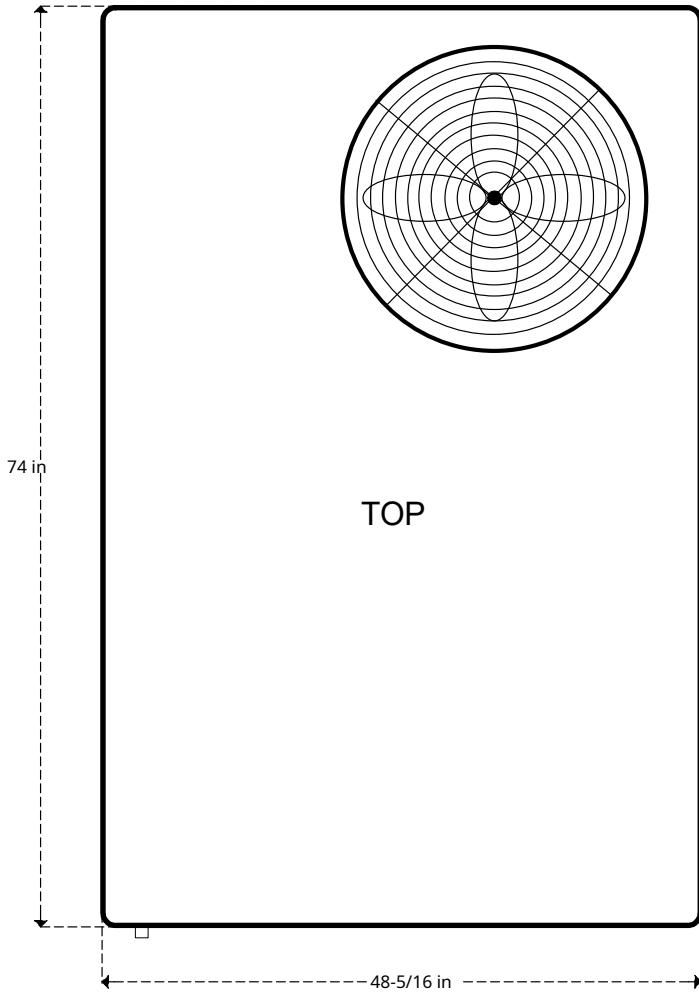


SPECIFICATIONS:

- 60,000 BTU/HR at 90F degree ambient and 55F degree water out
- 30,000 BTU/HR at 90F ambient and 28F water out (With LT)
- Electrical: 460V, 60hz three phase
- Minimum Circuit Ampacity: 13, Maximum Fuse Size 20 Amps
- (1) Copeland scroll compressor
- (1) 65G insualtd stainless steel tank
- (1) 1-1/2 HP water pump: 47 GPM max, 49 PSI max
- R-32 refrigerant
- Approximate shipping weight 810 LBS
- Dimensions: 48-5/16" wide, 74" long, 39-7/8" tall
- Decibels: 78

OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Hot Gas Recovery
- Upgraded Tank Insulation
- Secondary/Back-up Pump
- Low Level Alarm
- Expansion Ports
- Dry Chiller For Secondary Cooling
- Hailguards
- Seismic-rated Curb

FRONT

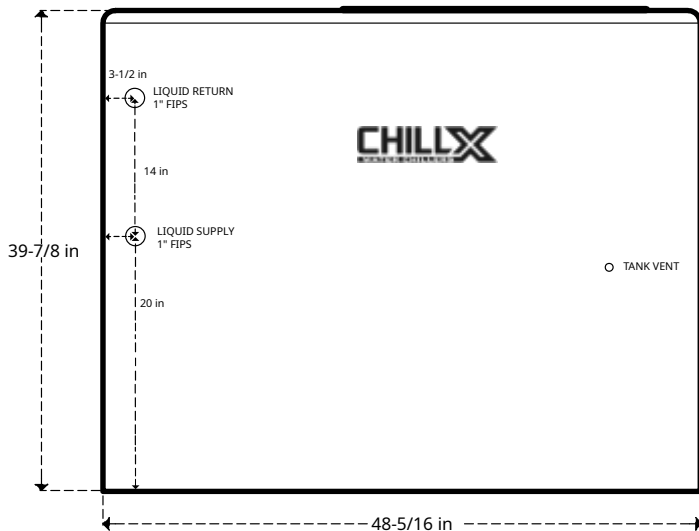

REAR

