


## MODEL CXCA060CRS1

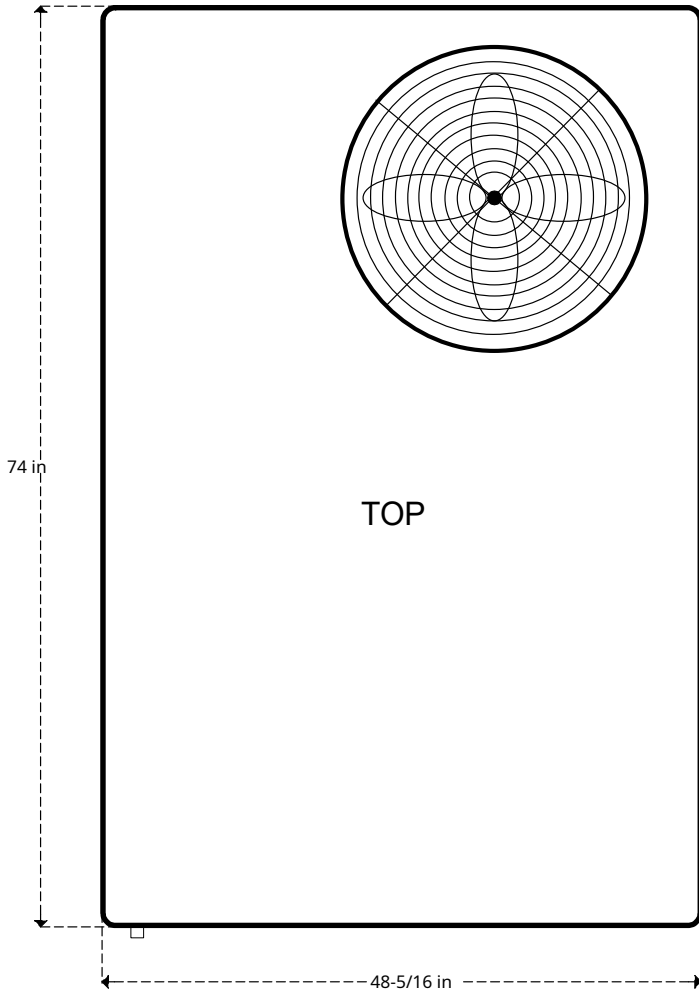


### SPECIFICATIONS:

- 60,000 BTU/HR at 90F ambient and 55F water out
- 30,000 BTU/HR at 90F ambient and 28F water out (With LT)
- Electrical: 208/230V, 60hz single phase
- Minimum Circuit Ampacity: 42, Maximum Fuse Size 68 Amps
- (1) Copeland scroll compressor
- (1) 65G insulated stainless steel tank
- (1) 1 HP water pump: 47 GPM max, 49 PSI max
- R-32 Refrigerant
- Approximate shipping weight 810 LBS
- Dimensions: 48-5-16" wide, 74" long, 39-7/8" tall
- Decibels: 78

### OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Hot Gas Recovery
- Upgraded Tank Insulation
- Secondary/Back-up Pump
- Low Level Alarm
- Expansion Ports
- Dry Chiller For Secondary Cooling
- Hailguards
- Seismic-rated Curb

### FRONT

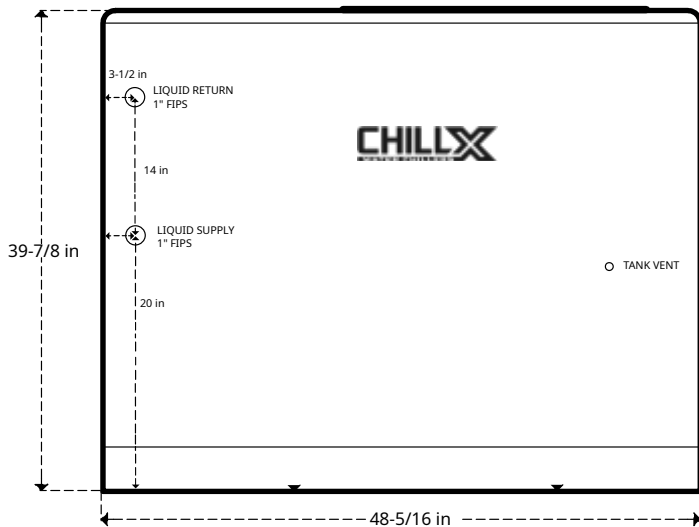

### REAR

