


## MODEL CXCA102CRD3

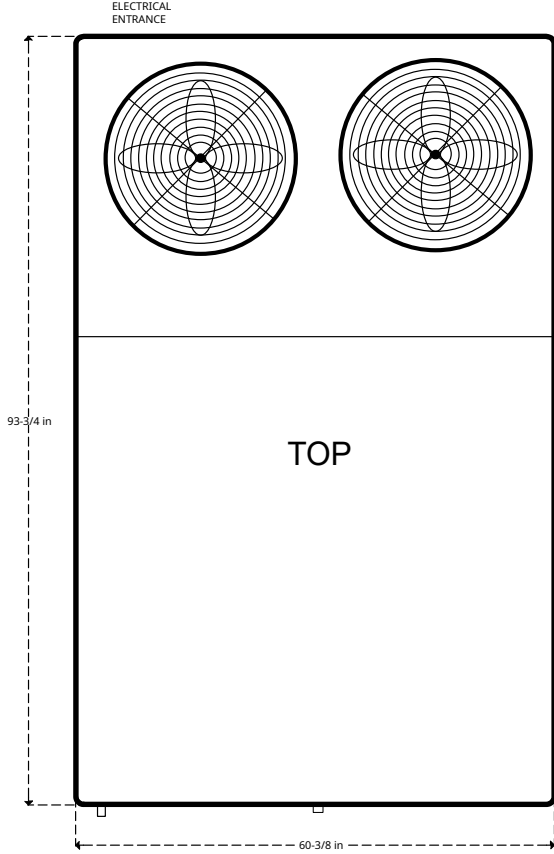


### SPECIFICATIONS:

- 102,000 BTU/HR at 50F LWT and 90F ambient
- 51,000 BTU/HR at 28F LWT and 90F ambient (With LT Upgrade)
- Electrical: 208/230V, 60hz three-phase
- Minimum Circuit Ampacity: 47, Maximum Fuse Size 53 Amps
- (2) Copeland scroll compressors
- (1) 135G stainless steel tank
- 1.5 HP water pump: 59 GPM max, 51 PSI max
- R-32 Refrigerant (Fully charged and tested)
- Approximate shipping weight 1,400 LBS
- Dimensions: 60-3/8" wide, 93-3/4" long, 54-5/8" tall
- Decibels: 82

### \* OPTIONS:

- Expansion Ports
- Hot Gas Recovery
- Upgraded Tank Insulation
- Secondary/Back-up Pump
- Low level alarm
- Dry Chiller For Secondary Cooling
- Controller Extension Cord (+16')
- Hail guards
- Low Temp (~28F LWT)
- Two-stage Controller

FRONT

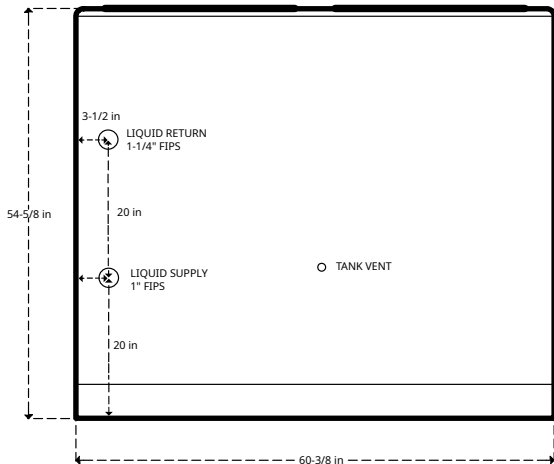

SIDE

