


MODEL CXGC024NRCKS1


TOP

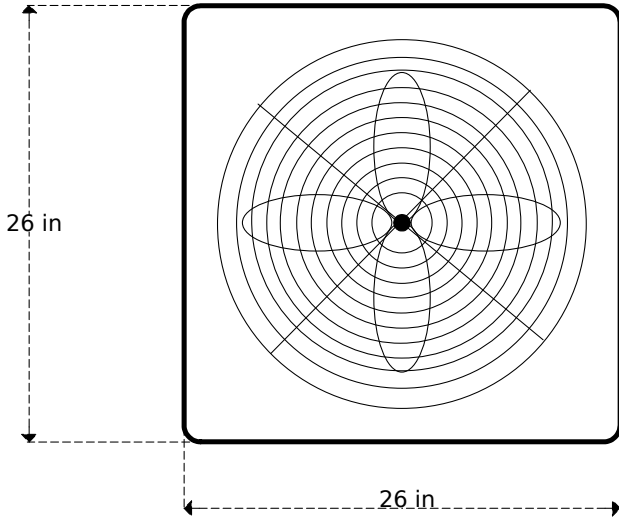

SPECIFICATIONS:

- 24,000 BTU/HR at 95°F ambient & 50°F water out
- Electrical: 208/230V, 60hz single phase
- Minimum Circuit Ampacity: 13.6, Max Fuse Size 20 Amps
- Custom double coaxial HX evaporator
- Flow switch safety
- Low ambient start of -30°F
- R410a Refrigerant
- (1) 24,000 BTU/HR Copeland scroll compressor
- Approximate shipping weight 350 LBS
- Dimensions: 26" wide, 26" long, 27-1/2" tall
- ETL Laboratory Approved : ETL # 3195605
- Decibels: 84

FRONT

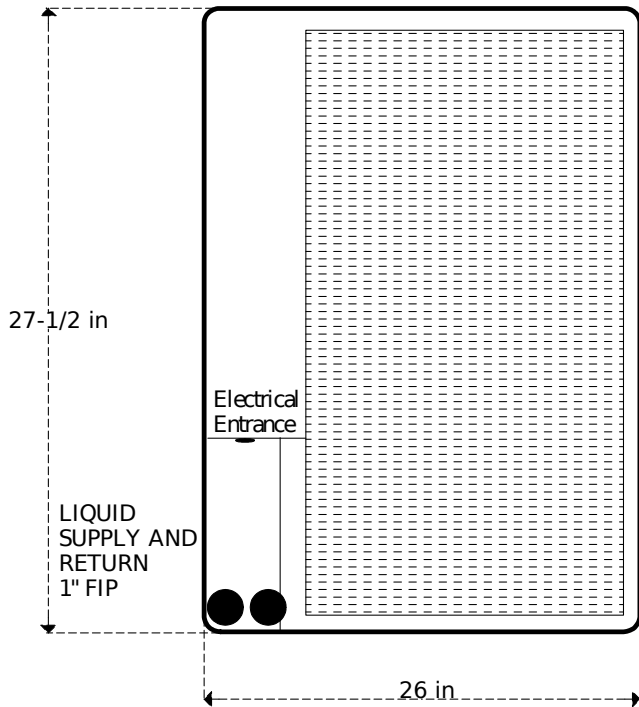

REAR

