




TOP

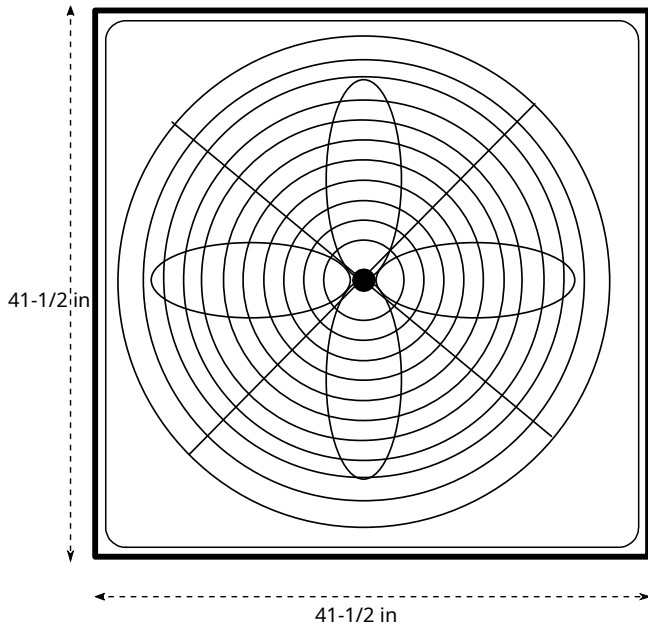

## MODEL CXVA090CRS3CR


### SPECIFICATIONS:

- Low temperature chiller
- 90,000 BTU/HR at 90F ambient and 55F water out
- 45,000 BTU/HR at 90F ambient and 28F water out (With LT)
- Electrical: 208/230V, 60hz three phase
- Minimum Circuit Ampacity: 47, Maximum Fuse Size 68 Amps
- (1) 40G insulated stainless steel tank
- (1) 1-1/2 HP water pump: 59 GPM max, 51 PSI max
- Fully charged with refrigerant and load tested
- (1) Copeland scroll compressor
- Approximate shipping weight 845 LBS
- Dimensions: 41-1/2" wide, 41-1/2" long, 76-1/2" tall
- Decibels: 76

### OPTIONS:

- Low Temp (28F Leaving Water Temp)
- Two-stage Thermostatic Controller
- Low Level Alarm
- Expansion Ports
- Extra Insulation
- Controller Extension Cord (approx 15')

FRONT

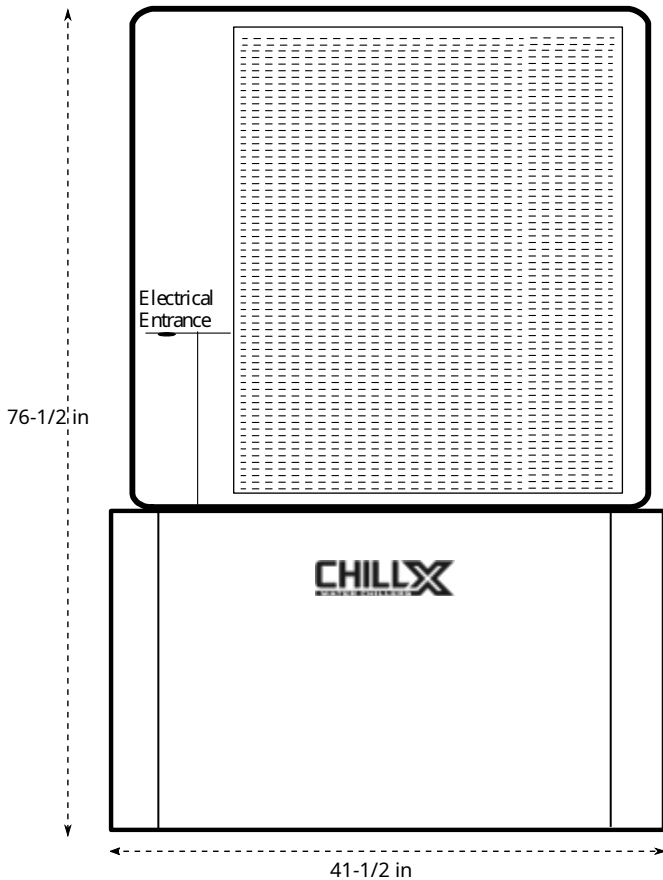

REAR

