



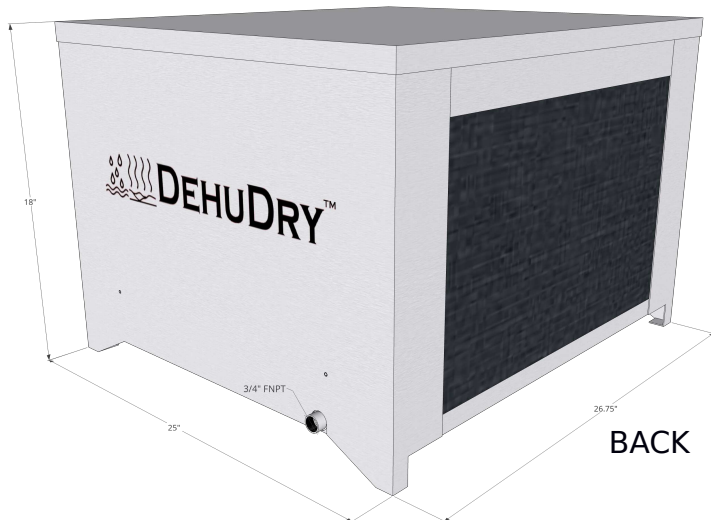

510 PPD HIGH CAPACITY DEHUMIDIFIER

MODEL DHCA0024CNS2-8Z

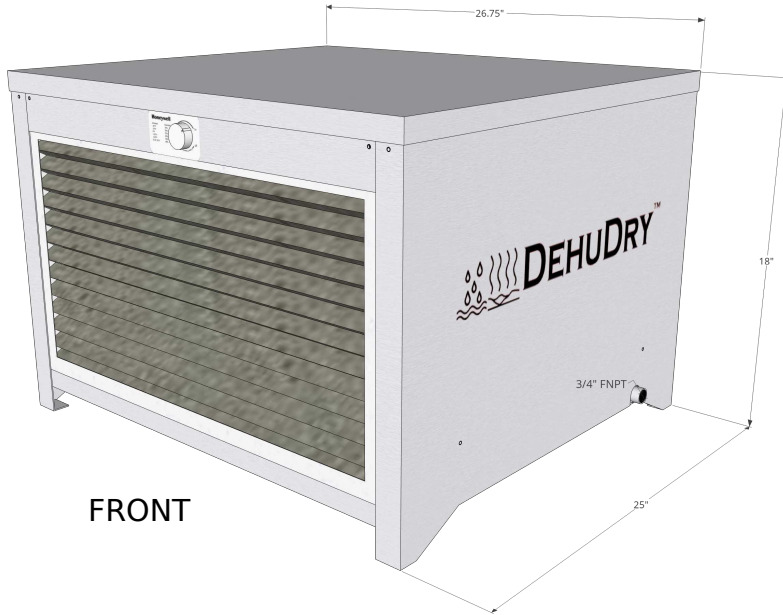

SPECIFICATIONS

CAPACITY

NOMINAL	2 Ton
PERFORMANCE	510 PPD @ 80F & 60% rH
CFM	1,010 CFM (Approx)

COMPRESSOR

TYPE	(1) Copeland Scroll / 24k BTU/HR Approx
CAPACITY	24,000 BTU/HR (Approx)
REFRIGERANT	R410a

POWER

SUPPLY	230V Single-Phase
AMPS	11.7 Amps
MCA	11.7 Amps
MOP	15 Amps
CORD	230V Single-Phase Cord (Included)

CONDENSATE

DRAIN PAN	Powder Coated Steel
DRAIN PORT	3/4" FNPT

CONSTRUCTION

MATERIAL	Stainless Steel Panels & Frame
FASTENERS	Stainless Steel Rivet Nuts & Screws

AIR FILTER 12" x 24" x 1" (1x MERV11 Included)

PRE-COOL Dehu-assist (Standard)

RE-HEAT For Neutral Temp Output (Standard)

CONTROLLER Honeywell Dehumidistat (Standard)

DECIBELS 84dB

WARRANTY 3 Year Limited

OPTIONS / ACCESSORIES

MOUNTING KITS

SINGLE HANGING	1"x1" Tabs (For Use W/ All-thread Rods)
2-TIER CARRIAGE	2-tier Stainless Steel Mounting Rack
3-TIER CARRIAGE	3-tier Stainless Steel Mounting Rack
SURFACE	Adjustable/Threaded Feet

CONTROLLER Wireless/Bacnet By Johnson Controls

DIMENSIONS

	PRODUCT	SHIPPING
LENGTH (IN)	25	34
WIDTH (IN)	26.75	32
HEIGHT (IN)	18	25
WEIGHT (LBS)	170	235

PO Box 66032 Austin, TX 78766 | 800.886.1353

DehUDRY.com